


MULTIPLE SECTION DETAIL  
(2:1 FROM DRAWING BELOW)



SECTION

ELEVATION (CLOSED  
BLADE POSITION SHOWN)

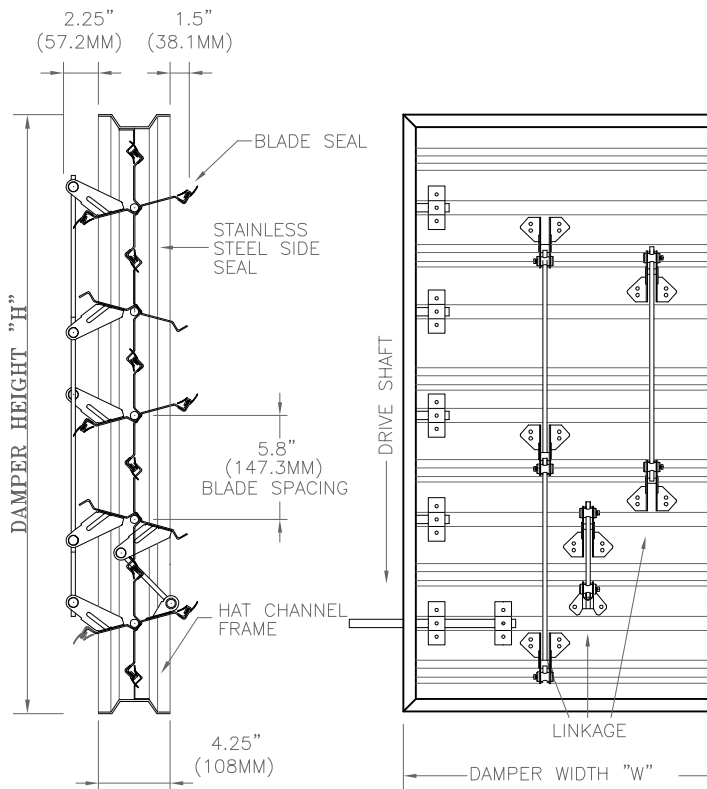

## COMMERCIAL OPPOSED BLADE DAMPER OBS-4H6

### STANDARD SPECIFICATIONS

- CONST. - FORMED GALVANIZED STEEL. WELDS COATED WITH ZINC RICH PAINT
- FRAME - 4.25" X .75" X .108", 12 GA. (108MM X 19.1MM X 2.8MM) GALVANIZED STEEL CHANNEL.
- BLADES - 6" X .064", 16 GA. (152.4MM X 1.6MM) FORMED GALV. STEEL, 5.8" (147.3MM) BLADE SPACING
- SEALS - DUAL DUROMETER VINYL BLADE SEAL, -40 DEG. F. TO +200 DEG. F., S.S. SIDE SEALS
- SHAFTS - .5" (12.7MM) DIA. C.R. PLATED STEEL
- BEARINGS - .5" (12.7MM) OILITE BRONZE BUSHINGS
- LINKAGE - IN AIRSTREAM, ROD TRAVEL 5.25" (133.4MM)
- DRIVE SHAFT - .5" (12.7MM) DIA. C.R. PLATED STEEL EXTENDING 6" (152.4MM) OUT OF FRAME
- FINISH - MILL GALVANIZED STEEL
- SIZE - MINIMUM 8" W X 15" H (203.2MM X 381MM)  
- MAXIMUM 48" W X 72" H (1219.2MM X 1828.8MM)

### OPTIONS

- FRAME - 4" X 1" X .108", 12 GA. (101.6MM X 25.4MM X 2.8MM) GALV. "C" CHANNEL FRAME, BUTT WELDED
- BEARINGS - .5" (12.7MM) NYLON BUSHINGS  
.5" (12.7MM) BALL BEARINGS ("C" CHANNEL ONLY)
- JACK SHAFT - SEE SIZING CHART
- CONTROL - MANUAL, JACK SHAFTS, MOTORIZED ETC.

### TECHNICAL NOTES

- CAUTION - ADVISED ON TYPE OF APPLICATION
- MAX. RECOMMENDED VEL. - 2000 FPM
- MAX. SYSTEM PRESSURE - SEE CHART
- MAXIMUM TEMPERATURE - 200 DEG. FAHRENHEIT
- LEAKAGE - LESS THAN .5% AT 4" W.G.
- SHIPPING WEIGHT - APPROX. 6 LBS/SQ. FT.
- LARGER SIZES - MULTIPLE SECTIONS WILL BE PROVIDED FOR RE-ASSEMBLY BY OTHERS

DAMPER IS MANUFACTURED .25" (6MM) SMALLER THAN ORDERED SIZE UNLESS EXACT DIMENSIONS ARE STATED

\* FOR MORE INFORMATION, CONTACT OUR FACTORY \*

## NOTES



## APPROVAL

DATE:  
PROJECT:  
ENGINEER:  
CUSTOMER:  
DISTRIBUTOR:

OBS-4H6





# COMMERCIAL OPPOSED BLADE DAMPER OBS-4H6

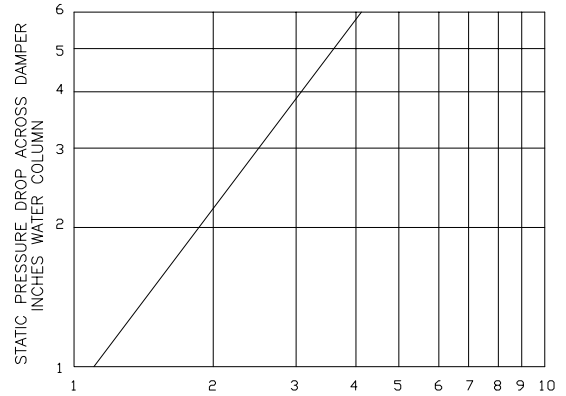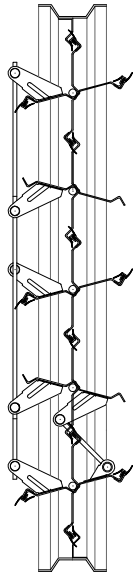

TORQUE REQUIREMENT CHART: INCH - LBS./SQ. FT.		
1000 F.P.M. @ 2" W.G.	1000 - 2000 F.P.M. @ 3" W.G. (X 1.5)	1000 - 2000 F.P.M. @ 4" W.G. (X 2.0)
5 IN. LBS./SQ. FT.	7.5 IN. LBS./SQ. FT	10 IN. LBS./SQ. FT

MAXIMUM SYSTEM PRESSURE			
12" WIDE 4" SP W.G.	24" WIDE 4" SP W.G.	36" WIDE 3" SP W.G.	48" WIDE 2.5" SP W.G.

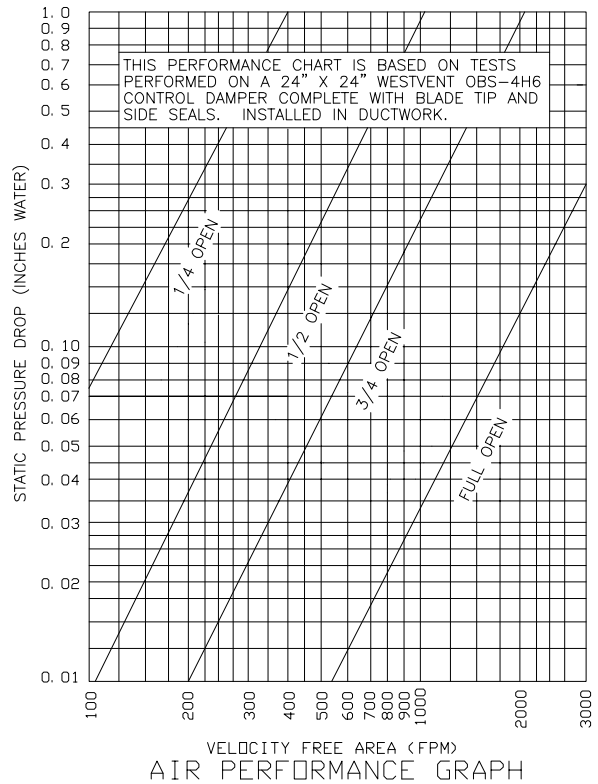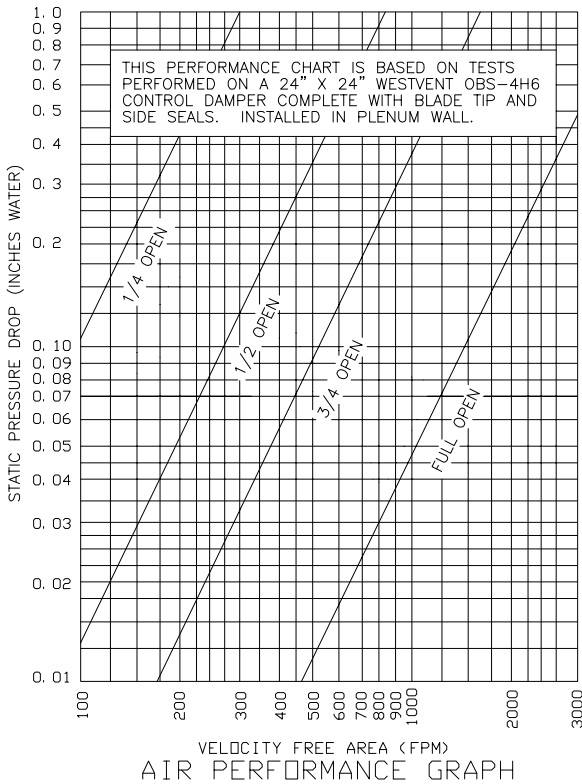

THE INFORMATION CONTAINED ON THIS DATA SHEET REMAINS THE PROPERTY OF WESTERN VENTILATION PRODUCTS LTD. AND IS PROTECTED BY COPYRIGHT. WESTVENT AIR PERFORMANCE RATINGS SHOWN ARE BASED ON TESTS MADE BY TECHNICIANS IN OUR TEST LABORATORY.