



westvent[®]

**EQUIPMENT ROOF CURB
MODEL FA
(FIELD ASSEMBLY)**

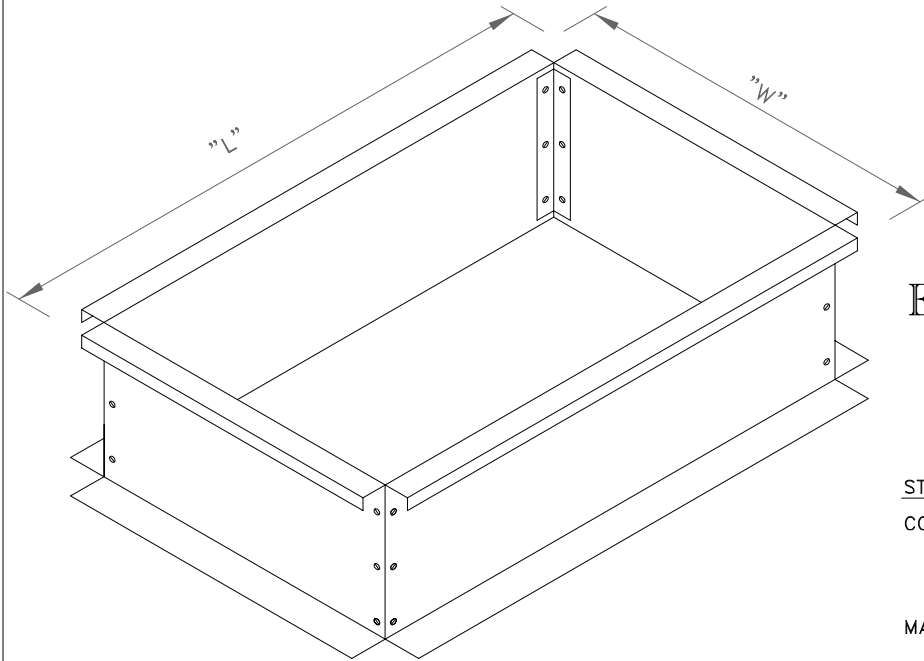

FIELD ASSEMBLY ROOF CURB

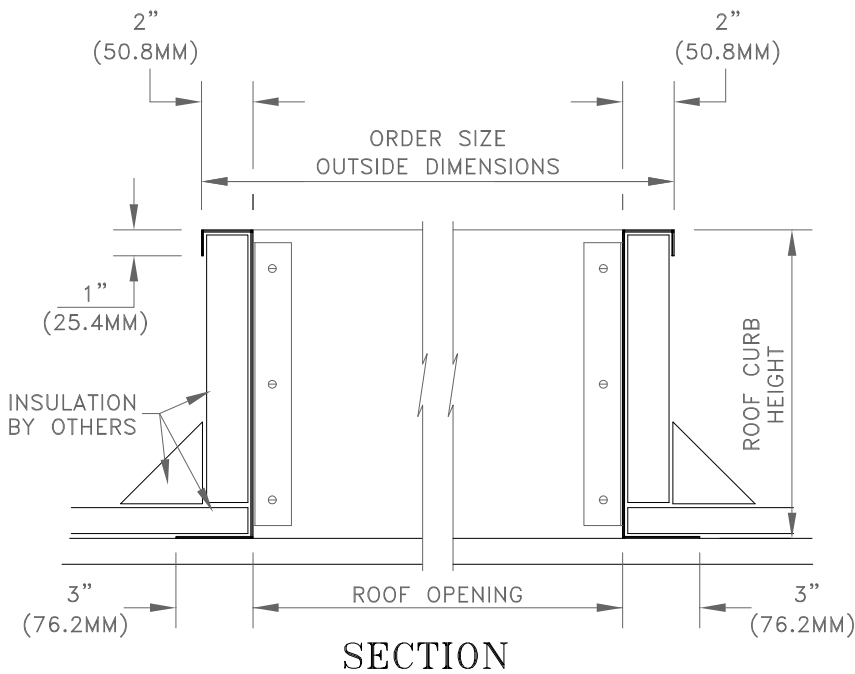

STANDARD SPECIFICATIONS

- CONST.** - FORMED GALVANIZED IRON, CHANNEL TYPE FRAME, COMPLETE WITH FOUR (4) CORNER ANGLES, PREPUNCHED FOR EASY FIELD ASSEMBLY
- MATERIAL** - 12" X 3" X 2" (304.8MM X 76.2MM X 50.8MM) 16 GA. GALVANIZED IRON, C/W FOUR (4) 1.5" X 1.5" X 11" (38.1MM X 38.1MM X 279.4MM) BOTH FRAME AND CORNER ANGLE, PREPUNCHED WITH SIX .313" (7.9MM) HOLES .25" (6.4MM)
- FINISH** - MILL GALVANIZED STEEL
- SIZE** - MIN: 12" L X 12" W X 12" H O.D. (304.8MM X 304.8MM X 304.8MM)
- MAX: 120" L X 120" W X 12" H O.D. (3048MM X 3048MM X 304.8MM)
- ASSEMBLY** - TWENTY FOUR .25" X .50" (6.4MM X 12.7MM) PAN HEADED STOVE BOLTS AND NUTS FOR FIELD ASSEMBLY

OPTIONS

- CONST.** - HEAVIER MATERIALS

TECHNICAL NOTES

ORDER SIZE - OUTSIDE DIMENSIONS

THIS TYPE OF CURB IS FOR PLACING DIRECTLY ON TOP OF ROOF STRUCTURE AND ROOFING INSULATION IS BY OTHERS

THE CURB IS SHIPPED UNASSEMBLED. TO BE FIELD ASSEMBLED BY OTHERS

* FOR MORE INFORMATION, CONTACT OUR FACTORY *

NOTES

APPROVAL

DATE:
PROJECT:
ENGINEER:
CUSTOMER:
DISTRIBUTOR:

ROOF-FA