


ORDER BY
(W X L) OUTSIDE CURB
DIMENSIONS

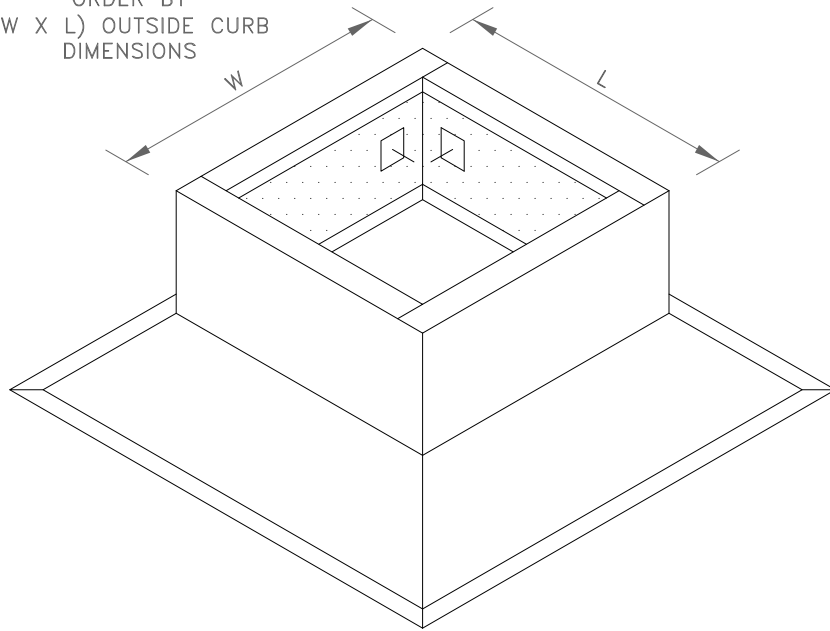

PREFAB ROOF CURB MODEL PF-1

STANDARD SPECIFICATIONS

- CONST. - 20 GAUGE GALV. STEEL, WELDED CORNERS, BUILT-IN CANT STRIP
 MATERIAL - 20 GA. GALVANIZED STEEL, 1.5" (38.1MM) FIBREGLASS INSULATION
 FINISH - MILL GALVANIZED STEEL
 SIZE - MIN: 12" W X 12" L X 8" H O.D. (304.8MM X 304.8MM X 203.2MM)
 MAX: 66" W X 66" L X 8" H O.D. (1676.4MM X 1676.4MM X 203.2MM)

OPTIONS

- MATERIAL - VARIOUS GAUGES AVAILABLE
 ACCESS. - SOUND INSULATION AND BAFFLES
 ACCESS. - BACKDRAFT DAMPERS
 SPECIFY HEIGHT,
 AVAILABLE IN: 12" (304.8MM) HEIGHT


TECHNICAL NOTES

FOR FLAT ROOFS ONLY

RIGID SUPPORT FRAME SHOULD BE PLACED ON INSIDE EDGE OF ROOFING

ROOF CURB OUTSIDE DIMENSIONS SHOULD BE 1" (25.4MM) SMALLER THAN EQUIPMENT CURB CAP INSIDE DIMENSIONS

* FOR MORE INFORMATION, CONTACT OUR FACTORY *

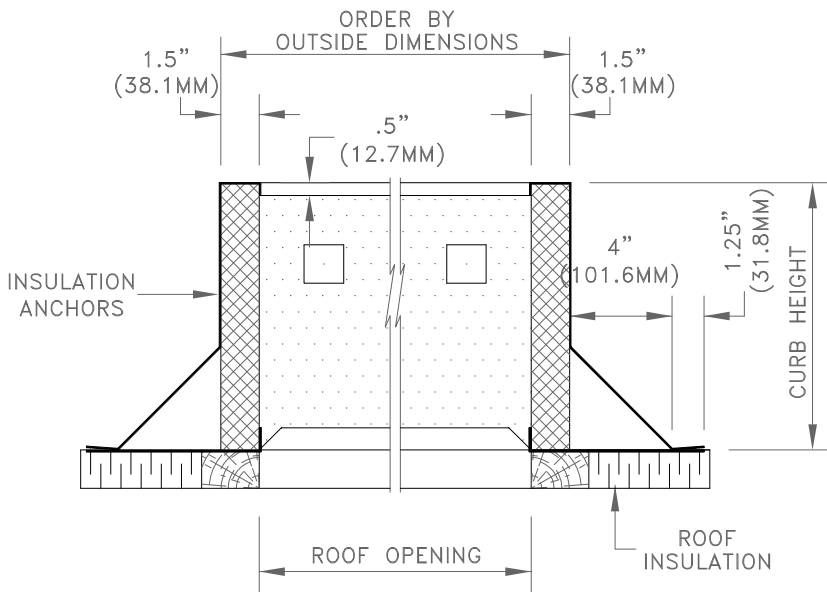

SECTION

ORDER SIZE

QUANTITY	MODEL	INSIDE DIMENSIONS	OUTSIDE DIMENSIONS	HEIGHT	"R"	OPTIONS	TAG: DESCRIPTION OR NOTES

NOTES

APPROVAL

DATE:
 PROJECT:
 ENGINEER:
 CUSTOMER:
 DISTRIBUTOR:

CURB-PF1