


**PENTHOUSE  
MODEL P1-XC-635V  
(MITERED CORNERS)**

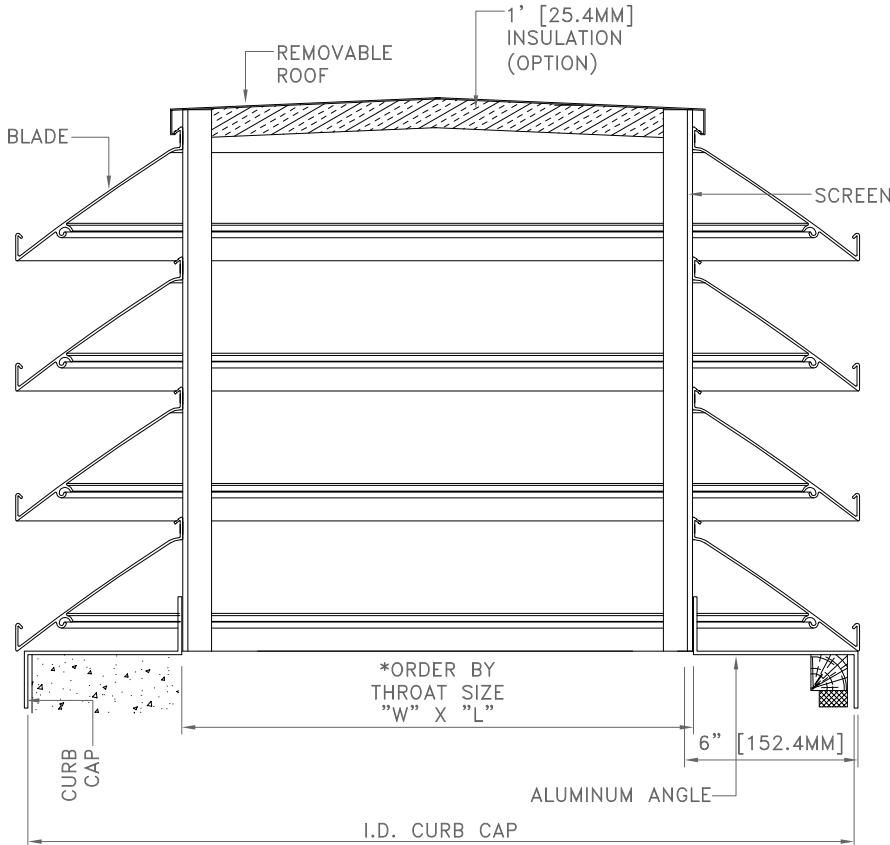

STANDARD SPECIFICATIONS

- CONST. - 6063-T5 EXTRUDED ALUMINUM, WELDED ASSEMBLY
- CURB CAP - 6" X 2" (152.4MM X 50.8MM FORMED ALUMINUM ANGLE)
- BLADES - 635V - 6" X .081", (152.4MM X 2.1MM) SET AT 35°, 4.5" (114.3MM) BLADE SPACING, TYPE "V"
- SCREEN - .5" X .5" (12.7MM X 12.7MM) X 18 GAUGE GALVANIZED, SCREW FASTENED INSIDE
- ROOF - FORMED SHEET ALUMINUM, GALV. STEEL MAY BE SUBSTITUTED WHEN PRODUCT IS PAINTED
- FINISH - MILL ALUMINUM
- SIZE - MIN. 12 "W" X 12 "L" X 16" H (304.8MM X 304.8MM X 406.4MM)  
MAX. 96" X 144" X 96" (2438.4MM X 3657.6MM X 2438.4MM)

TECHNICAL NOTES

- MAX. REC. INTAKE VEL.- 1047 FPM THROUGH FREE AREA
- SHIPPING WEIGHT - APPROX. 6 LBS./SQ. FT. OF LOUVER FACE AREA PLUS 10%

\* FOR MORE INFORMATION, CONTACT OUR FACTORY \*

**VERTICAL SECTION**

NOTE: (W + 13) & (L + 13) = INSIDE DIMENSION OF PENTHOUSE CURB CAP

**NOTES**

**APPROVAL**

DATE:  
PROJECT:  
ENGINEER:  
CUSTOMER:  
DISTRIBUTOR:

P1-XC-645V