


# JACK SHAFT GUIDE

FOR PARALLEL BLADE DAMPERS  
PBS-4H6 & PBX-4H6

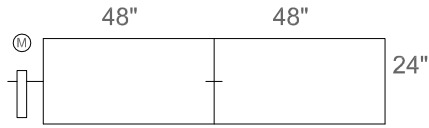


2 SECTION WIDE X 1 SECTION HIGH  
WITH JOINER PINS

TO SELECT ACTUATORS AND TORQUE REQUIRED,  
SEE INDIVIDUAL DAMPER PERFORMANCE SHEETS.


FOR LARGER DAMPERS, PLEASE CONTACT OUR  
MANUFACTURING PLANT.

1 MAXIMUM SIZED SECTION IS 48" WIDE X 72" HIGH  
(FOR PBS-4H6 & PBX-4H6)


**NOTE:** USE OF JOINER PINS IS LIMITED TO  
96" WIDE AND 24" HIGH WIDE MAXIMUM  
(2 SECTIONS)

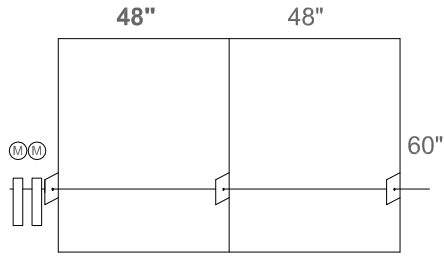


2 SECTIONS WIDE X 1 SECTION HIGH  
=  $\frac{3}{4}$ " JACKSHAFT

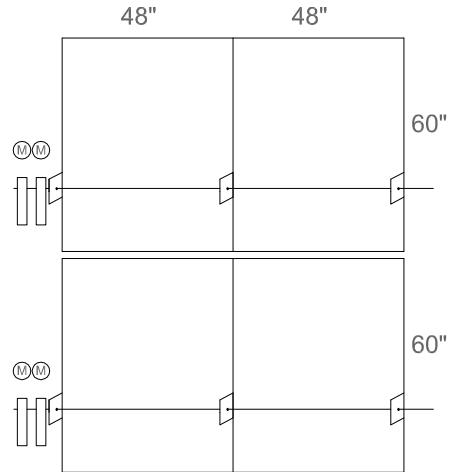


2 SECTIONS WIDE X 2 SECTIONS HIGH  
=  $\frac{3}{4}$ " JACKSHAFTING

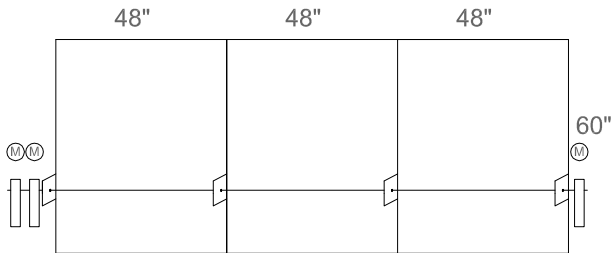

3 SECTIONS WIDE X 1 SECTION HIGH  
= 1" JACKSHAFT

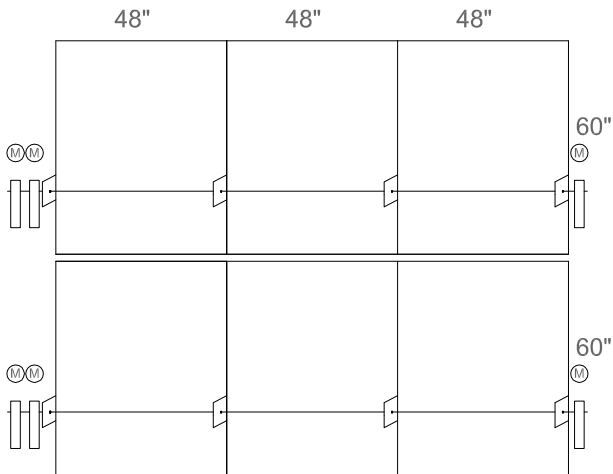

3 SECTIONS WIDE X 1 OR  
MORE SECTIONS HIGH  
= 1" JACKSHAFTING

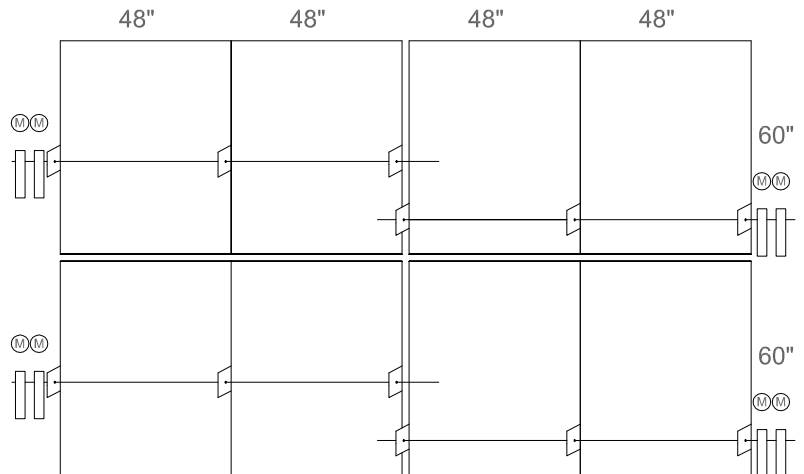

4 SECTIONS WIDE X 2 SECTIONS HIGH  
=  $\frac{3}{4}$ " JACKSHAFTING

JACKSHAFT GUIDE-PARALLEL